


# CRLC SERIES COMMERCIAL INDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CRLC8-20W-MCT-D  
CRLC8-20W-MCT-D-WH  
8" LED COMMERCIAL RECESSED LIGHT

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

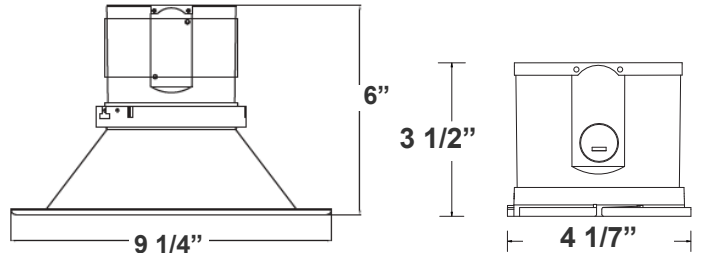

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

9 1/4"(L) X 6" (H)

## Features

- 8" Haze & White Finish TRIM
- MCT: The switch is on the light engine
- Mounting Options: Recessed
- 5-Year Warranty
- Lifespan: 50,000 hrs.

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W
- Power factor: >0.90
- Efficacy: 85 LPW

### Mechanical:

- 8" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

### Lighting:

- MCT: The switch is on the light engine
- Dimming: 0~10V Dimmable
- Total lumens: 1720LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

### Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

### Other Models:


- 15W | 1275LM | CRLC8-15W-MCT-D
- 15W | 1275LM | CRLC8-15W-MCT-D-WH




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



## Photometrics: CRLC8-20W-MCT-D

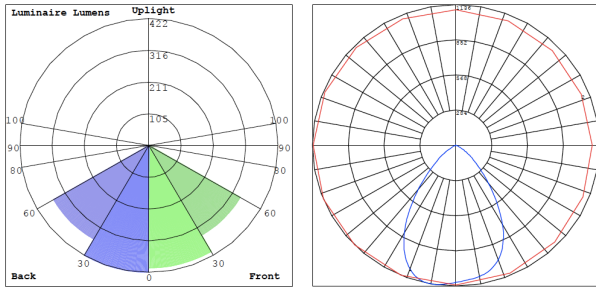

BUG Rating: B1-U1-G0

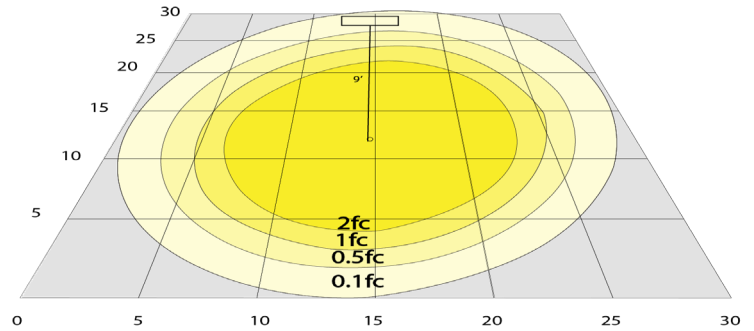

20W 5000K, Area 30" x 30" Mounting Height: 9'

## Other Views:

Hazel



CRLC-EGN-20W-MCT-D



CRLC-TRM-8



CRLC8-20W-MCT-D

Whitev



CRLC-EGN-20W-MCT-D



CRLC-TRM-8-WH



CRLC8-20W-MCT-D-WH

## Performance Table: CRLC8-20W-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC8-20W-MCT-D	20W	120-277V	1720LM	3000K	B1-U1-G0	85
CRLC8-20W-MCT-D-WH				4000K		
				5000K		

## Sample Ordering

Model Watt Dimming Housing

8 - 20W - MCT - D -

Blank  
WH = WHITE

## Factory-Installed Option:

Blank = No Option For Accessories  
OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

## Factory-Installed Option:



OPT-EM-HB1EXT  
EXTERNAL EMERGENCY  
BACK UP BATTERY

## Example:

1. CRLC8-20W-MCT-D (FOR 20W CRLC8 MCT 120-277V)

1. CRLC8-20W-MCT-D (FOR 20W CRLC8 MCT 120-277V)  
OPT-EM-HB1EXT (EXTERNAL EMERGENCY BACK UP BATTERY)

