


# FLD3 SERIES OUTDOOR LIGHTING

FLD3-25W-MCT-D-KN  
3RD GENERATION 3CCT FLOOD HEAD WITH PHOTOCELL  
**MCT** Multi Color Temperature (Selectable)

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

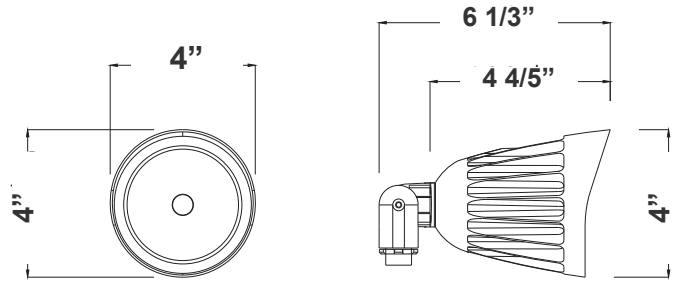

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

4"(H) x 6 1/3"(W) x 4"(D)

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 25W
- Efficacy: 140 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

### Lighting:

- Multi CCT: Selectable Multi-CCT Switches On The Back Of the fixture
- Dimming: 0-10V Dimming
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 3500LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 70,000 Hrs.

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

### Other Models:



- 13W | 1820LM | FLD3-13W-MCT-D-KN




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



**Photometrics:** FLD3-25W-MCT-D-KN



BUG Rating: B1-U1-G0

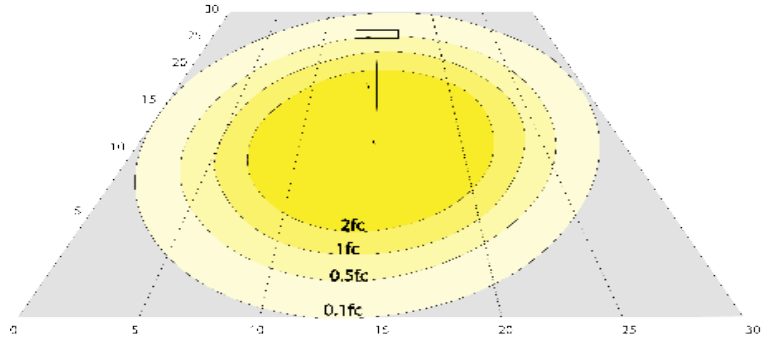

25W 3000K, Area 30'x 30' Mounting Height: 9'

**Other Views:**



Side View



Front View



Lens View

**Performance Table:** FLD3-25W-MCT-D-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLD3-25W-MCT-D-KN	13W	120-277V	1820LM	3000K 4000K 5000K	B1-U1-G0	140

**Sample Ordering**

Model	Watt	Color Temp.	Dimming	Mounting
FLD2	25W	MCTP	D	KN

