

# LLHB4 SERIES

Industrial Lighting

# WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LLHB4-150W-MP-40K-D

LLHB4-150W-MP-50K-D

4TH GENERATION OF LINEAR HIGH BAYS




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

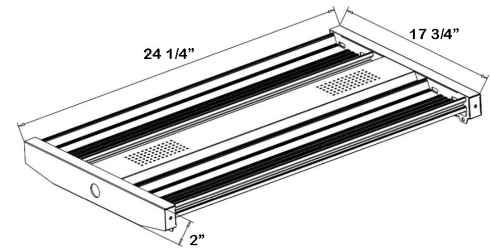

24 1/4" (L) X 17 3/4" (W) X 2" (H)

Ideal for replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing warehousing and other large indoor spaces with mounting heights from 10ft. to 40ft. the fixture can be surface mounted also.

## Features

- High quality LED Chips to provide high efficiency, heat dissipation
- Stability, and lumen maintenance
- Polycarbonate lens, high flame retardant point.
- 50,000 hours rated life
- 5-Year Warranty
- Multi-Power: The Switch is on the driver

## Technical Specifications

### Electrical:

- Voltage: 120~277VAC/50~60 Hz
- Wattage: 80W/110W/150W
- Power factor: >0.95
- Efficacy: 120 LPW

### Mechanical:

- Surge protector
- Steel housing
- Steel Thickness: 24 Gauge
- V-hooks
- Unprecedented quality.
- Aluminum LED board
- Operating temperature: -4°F ~ 131°F
- Suitable for damp locations

### Lighting:

- Multi-Power: The Switch is on the driver
- Dimming: 0~10V dimmable
- Lens: Polycarbonate Lens
- Total lumens: 18000LM (Per industry standards, Lumens are reported without frosted lens)
- Color temperatures: 4000K and 5000K
- Color rendering index: >80
- Wide Beam angle
- LED SMD type: Edison 2835

### Applications:

- Warehouse
- Manufacturing Plants Distribution Centers
- Industrial Commercial
- Grocery Stores Gymnasiums

### Other Models:




- 100W | 12000LM | LLHB4-100W-MP-40K-D-480V
- 100W | 12000LM | LLHB4-100W-MP-50K-D-480V



Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



## Photometrics: LLHB4

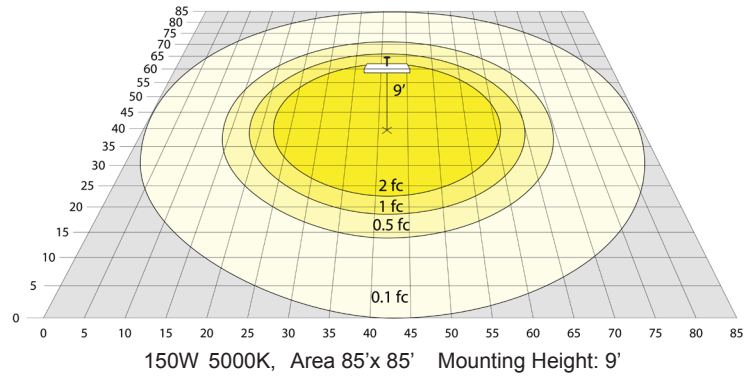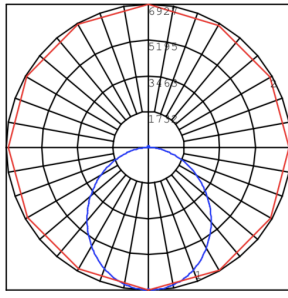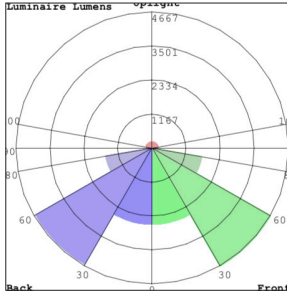

BUG Rating: B4-U3-G2

## Other Views:



Front View



Side View



Back View

## Performance Table: LLHB4

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLHB4-150W-MP-40K-D	80W 110W	120~277V	18000LM	4000K	B4-U3-G2	120
LLHB4-150W-MP-50K-D	150W	120~277V	18000LM	5000K	B4-U3-G2	120

## Sample Ordering

Model Wattage Multi Power Color Temp. Dimming

LLHB4 - 150W - MP - [ ] - D

40K = 4000K  
50K = 5000K

## Accessory Options

[ ]

SCL-GSY10 = Heavy-duty adjustable 10ft. 1/16" suspension kit with Y-connector & loop Gripper & Hooks

SCL-GSY20 = Heavy-duty adjustable 20ft. 1/16" suspension kit with Y-connector & loop Gripper & Hooks

LLHB4-RODKIT = Optional Rod Kit, 3-1/4" DIA. X 40" H

WEC-2MD-35 = Sensor Component

## Factory-Installed Options

[ ]

Blank = No Option

OPT-EM-OD1INT = Emergency Battery Backup

OPT-SEN-LLHB4 = Microwave BI-Level Sensor

OPT-EM-HB4EXT = External Emergency Battery Backup

OPT-LLHB4-SMK = SURFACE MOUNTING OPTION

OPT-FWH-63 = 6FT 3-Wire Whip

OPT-FWH-65 = 6FT 5-Wire Whip

OPT-FWH-66 = 6FT 6-Wire Whip

OPT-HBC-125TL-WH = 8FT, 15A, 125V, WHITE

OPT-HBC-277TL-WH = 8FT, 15A, 277V, WHITE

OPT-HBC-125SB-WH = 10FT, 15A, 125V, 18/3STR, WHT

LLHB4-150W-WG = 1Wire Guard for 150W

## Example:

1. LLHB4-150W-MP-50K-D (For LLHB4 150W 5000K MP fixture 120V-277V)
2. LLHB4-150W-MP-50K-D (For LLHB4 150W 5000K MP fixture 120V-277V)  
OPT-SEN-LLHB4 (For Factory-Installed Sensor)


## OPTIONAL ACCESSORIES



SCL-GSY10  
SCL-GSY20



LLHB4-100W-WG  
(Fixture Shown with  
LLHB4-100W-WG)



LLHB4-RODKIT  
(Fixture Shown with  
LLHB4-RODKIT)



WEC-2MD-35  
(Fixture Shown with  
WEC-2MD-35)



LLHB4-SMK  
(Fixture Shown with  
LLHB4-SMK)

## Factory-Installed Option



OPT-EM-OD1INT



OPT-SEN-LLHB4

