

# LOHB

## WALL WASH / SIGN / SUSPENDED

### TECHNICAL SPECIFICATIONS:

- :: Ideal for Wall Wash, Sign, Suspended Outdoor/ Indoor Lighting
- :: Housing: Die-cast aluminum housing with black powder coat
- :: Voltage: 120~277V; 60Hz AC
- :: 0~10V dimming (120W only)
- :: Power Factor: .9~.97
- :: Beam Angle: 90°
- :: Operating Temp: -40°F to 104°F
- :: CRI: >70
- :: 50,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP65

### APPLICATIONS:


- :: Ideal for indoor or outdoor highbay lighting, small stadium and tracks, sign lighting.



Mounting options on opposite page



Shown as a Sign/Wall Wash Light with Shroud & LOHB-K & WE167

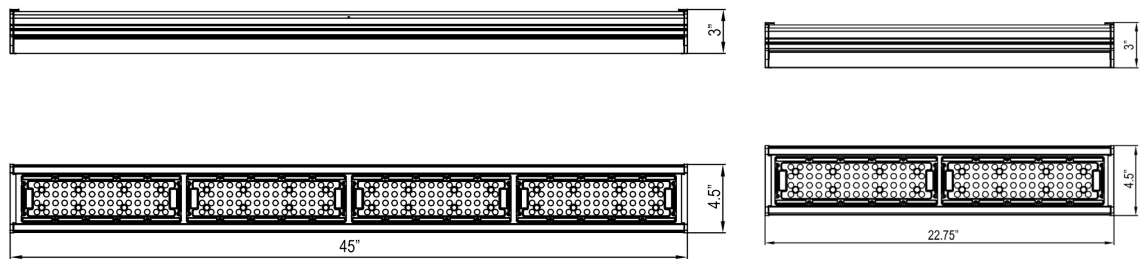


## LED OUTDOOR HIGHBAY / AREA / SIGN LIGHTS (120V-277V)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
LOHB-2FT-50W-30K	50W	6700LM	3000K	150~250 MH	22.75"(L) x 3"(H) x 4.5"(W)
LOHB-2FT-50W-50K	50W	6500LM	5000K	150~250 MH	
LOHB-4FT-120W-30K	120W	15000LM	3000K	200~400 MH	45"(L) x 3"(H) x 4.5"(W)
LOHB-4FT-120W-50K	120W	15000LM	5000K	200~400 MH	
LOHB-SH-2FT			Shroud for LOHB-2FT		
LOHB-SH-4FT			Shroud for LOHB-4FT		

A23 LED OUTDOOR HIGHBAY / AREA / SIGN LIGHTS

# LOHB MOUNTING ACCESSORIES

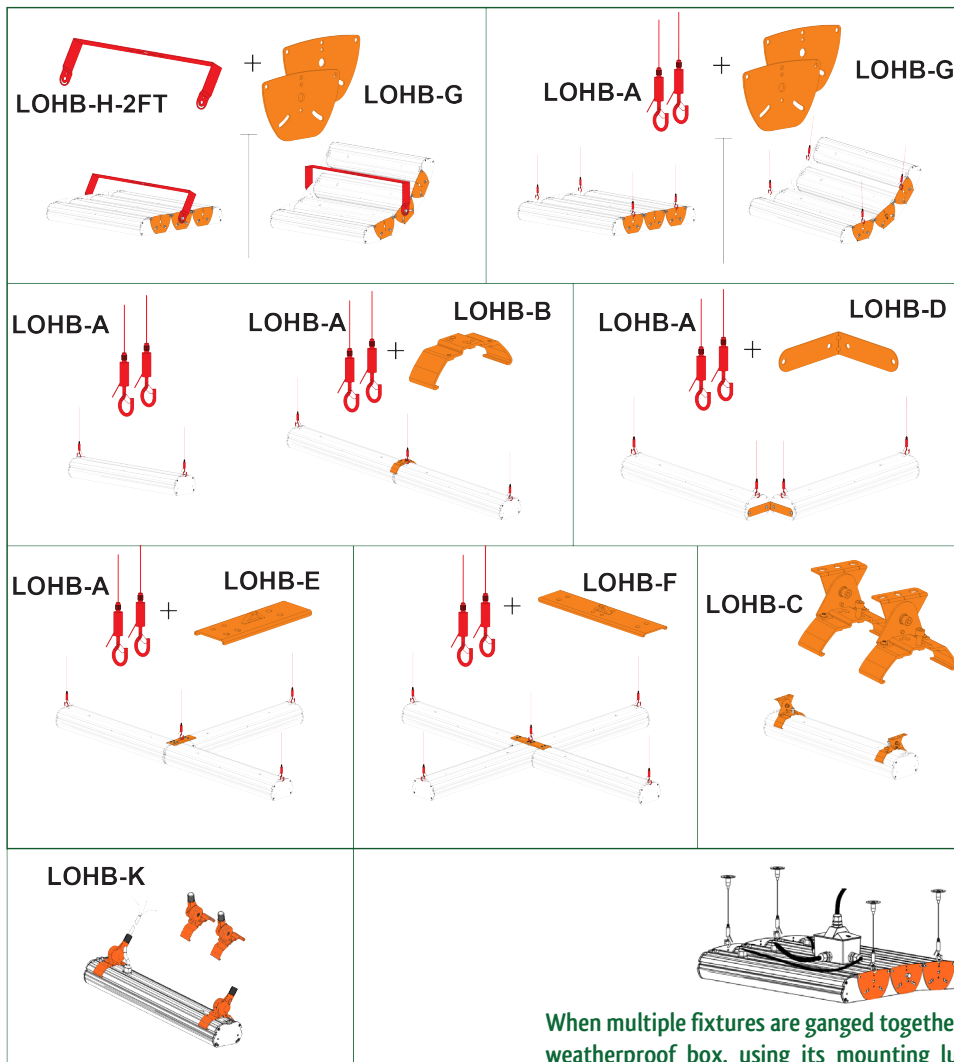

When multiple fixtures are ganged together, install a 1-Gang weatherproof box, using its mounting lugs, on the back channels of one of the fixtures. Use cord-grip connectors to connect the cables from all fixtures inside the box. (Box & Connectors not Included)

A24

LOHB MOUNTING ACCESSORIES

## LOHB MOUNTING ACCESSORIES

CATALOG NO.	DESCRIPTION
LOHB-A	3.3 Ft. Adjustable Aircraft Suspension Cables with hooks and 2.5" round ceiling mounting plate (set of 2)
LOHB-B	Tandem Coupling Bracket, Die-cast Aluminum
LOHB-C	Surface Mounting Brackets, Adjustable angle (set of 2), Die-cast Aluminum
LOHB-D	"L" Bracket, Stainless Steel
LOHB-E	"T" Mounting Bracket, Stainless Steel
LOHB-F	"X" Mounting Bracket, Stainless Steel
LOHB-G	Side by Side Fixture Coupling Brackets (set of 2), allows curve installation, Stainless Steel
LOHB-H-2FT	2Ft. Mounting Bracket, Hot-Rolled Steel
LOHB-K	1/2" NPT Threaded-Knuckle Adaptor (set of 2)