




DIMENSIONS:

9-1/2"(L) x 7-3/4"(W) x 4-1/2"(D)

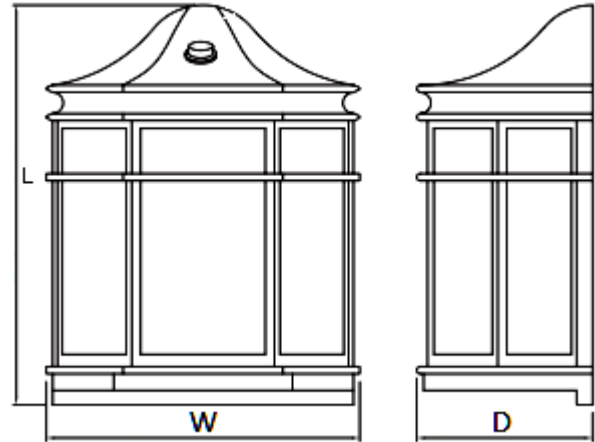

LRS-A-30K-PC
LRS-A-40K-PC
LRS-A-MCT-PC

LED RESIDENTIAL LANTERNS WITH PHOTOCELL

Ideal for general site lighting, residential houses, doorway, pathway and garages

ELECTRICAL SPECIFICATIONS:

- Voltage: 120ACV, 60 Hz
- Wattage: 12W
- Power Factor: 0.95
- Efficacy: 91LM/W

HOUSING SPECIFICATIONS:

- Aluminum housing with powder coated
- Includes pre-wired photocell
- Operating temperature: -40°F to 104°F
- Lifespan: 50,000 hr.
- IP Rating: IP65

CERTIFICATIONS:ETL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LRS-A-30K-PC	12W	120ACV	1150LM	3000K
LRS-A-40K-PC	12W	120ACV	1150LM	4000K
LRS-A-MCT-PC	12W	120ACV	1150LM	MCT

LIGHTING SPECIFICATIONS:

- LED: DOB
- Total lumens: 1150LM
- Color temperature: 3000K/4000K and MCT:3000K/4000K/5000K
- Color rendering index: >80

WARRANTY: 7 years

