

JOB NAME: \_\_\_\_\_


DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_



## DIMENSIONS:

24"(L) x 24"(W) x 3-1/8"(H)

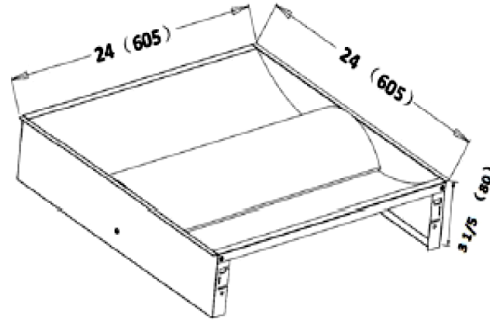

- LTR-2X2-40W-50K-D-PERF
- LTR-2X2-40W-40K-D-PERF
- LTR-2X2-40W-35K-D-PERF

## LED DIRECT-INDIRECT TROFFER LIGHTS

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC 50/60Hz
- Wattage: 40W
- Power factor: >0.97
- Efficacy: 107~110LM/W

### HOUSING SPECIFICATIONS:

- Steel Thickness: 24 Gauge
- Exclusive design lens installs from opening on ends to prevent leakage of light
- Modern mate white finish
- Earthquake hooks built into housing
- Operating temperature: -20°F ~ 105°F
- Lifespan: 50,000 hrs.
- IP rating: IP20

### CERTIFICATIONS: UL, DLC



### FACTORY-INSTALLED OPTIONS:



OPT-LTR-2X2-SRFC

MODEL	DESCRIPTION
OPT-LTR-2X2-SRFC	Surface Mounting Kit

### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: White painted Steel
- Total lumens: 4281~4417LM
- Color temperature: 5000K/4000K/3500K
- Color rendering index: >80

### WARRANTY: 5 years



JOB NAME: \_\_\_\_\_


DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_



**DIMENSIONS:**

24"(L) x 48"(W) x 3-1/5"(H)

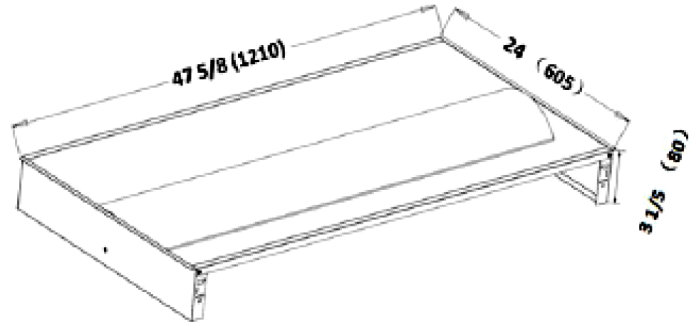

- LTR-2X4-50W-50K-D-PERF
- LTR-2X4-50W-40K-D-PERF
- LTR-2X4-50W-35K-D-PERF

**LED DIRECT-INDIRECT TROFFER LIGHTS**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 100-277VAC 50/60Hz
- Wattage: 50W
- Power factor: >0.97
- Efficacy: 107~110LM/W

**HOUSING SPECIFICATIONS:**

- Steel Thickness: 24 Gauge
- Exclusive design lens installs from opening on ends to prevent leakage of light
- Modern mate white finish
- Earthquake hooks built into housing
- Operating temperature: -20°F ~ 105°F
- Lifespan: 50,000 hrs.
- IP rating: IP20

**CERTIFICATIONS:** UL, DLC



**FACTORY-INSTALLED OPTIONS:**



OPT-LTR-2X4-SRFC

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LTR-2X4-50W-50K-D-PERF	50W	120~277VAC	5702LM	5000K
LTR-2X4-50W-40K-D-PERF	50W	120~277VAC	5590LM	4000K
LTR-2X4-50W-35K-D-PERF	50W	120~277VAC	5590LM	3500K

MODEL	DESCRIPTION
OPT-LTR-2X4-SRFC	Surface Mounting Kit

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10V dimmable
- Lens: White Painted Steel
- Total lumens: 5590~5702LM
- Color temperature: 5000K/4000K/3500K
- Color rendering index: >80

**WARRANTY:** 5 years

