SCL
2FT.

DOWN LIGHT

TECHNICAL SPECIFICATIONS:

:: 2 Feet long with coupling clip for tandem installation
:: 6Ft. Adjustable suspension cable set included
:: Wattage: 40W
:: Lumens: 2750LM
:: Surface Mounting Hardware included (not shown)
:: Optional Recessed Mounting Kit available
:: Voltage: 120~277VAC 50/60Hz
:: Ambient Temperature: -13ºF~104ºF
:: Dimmable: 0~10V dimmable
:: CRI:>80
:: Power Factor:>0.95
:: Efficacy: 110LM/W
:: IP Rating: IP20
:: Life Span: 50,000 hours
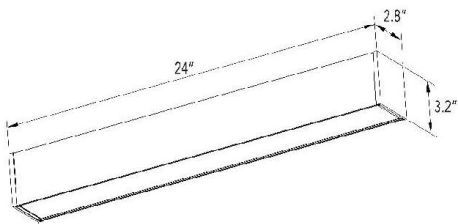:: Housing: White, Aluminum
:: Lens: Frosted Polycarbonate

B10

LED ROUND SUSPENDED COMMERCIAL LIGHTS

UL LISTED   DIMMING 0-10V   LM79 & LM80 TESTED   5 YEAR LIMITED WARRANTY

Optional Accessories (See Page B34)

SCL-RMK
(Optional)

6 Ft. Optional Cord
SJTW 18 AWG 5-Conductor
(Not Included)

2.8"
24"
3.2"

LED ARCHITECTURAL SUSPENDED LIGHTS (2FT.)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
SCL-2FT-25W-50K-D	25W	2750LM	5000K	
SCL-2FT-25W-40K-D	25W	2750LM	4000K	24"(L) x 2.8"(W) x 3.2"(H)
SCL-2FT-25W-35K-D	25W	2750LM	3500K	