




SCL

TECHNICAL SPECIFICATIONS:


- :: 4 Feet long with coupling clip for tandem installation
- :: 6Ft. Adjustable suspension cable set included
- :: Surface Mounting Hardware included (not shown)
- :: Optional Recessed Mounting Kit available
- :: Voltage: 120~277VAC 50/60Hz
- :: Wattage: Down Light: 40W Up/Down: 10W/30W
- :: Ambient Temperature: -13°F~104°F
- :: Dimmable: 0~10V dimmable
- :: CRI:>80
- :: Power Factor:>0.95
- :: Efficacy: 110LM/W
- :: IP Rating: IP20
- :: Life Span: 50,000 hours
- :: Housing: White, Aluminum
- :: Lens: Opal

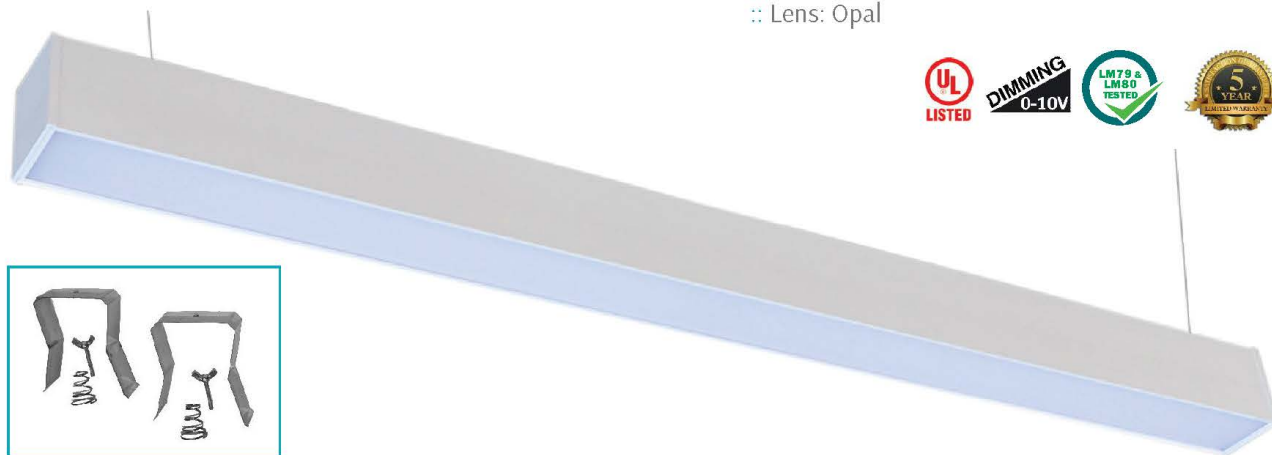

SCL-RMK
(Optional)

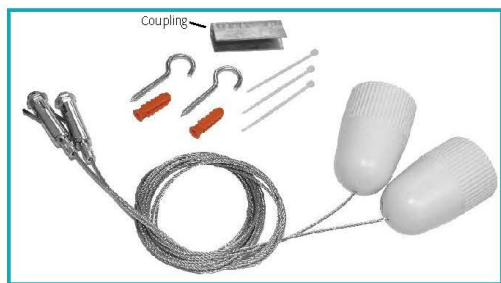

6 Ft. Suspension cable set with mini canopies & fixture coupling
(Included)

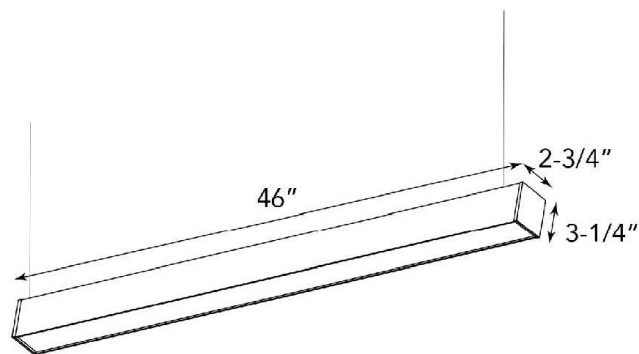

LED ARCHITECTURAL SUSPENDED LIGHTS

CATALOG NO.		WATTS	LUMENS	COLOR TEMP	DIMENSIONS
DOWN LIGHT	UP/DOWN LIGHT				
SCL-4FT-40W-50K-D	SCL-4FT-UD-40W-50K-D	40W	4400LM	5000K	46”(L) x 2-3/4”(W) x 3-1/4”(H)
SCL-4FT-40W-40K-D	SCL-4FT-UD-40W-40K-D	40W	4400LM	4000K	
SCL-4FT-40W-35K-D	SCL-4FT-UD-40W-35K-D	40W	4400LM	3500K	
SCL-SMK	6Ft. Adjustable suspension aircraft cable set + mini canopies & fixture coupling - 1 Set included per fixture				
SCL-RMK	Recessed mounting kit - Optional				

