

SCLP

TECHNICAL SPECIFICATIONS:


- :: 4 Feet long with coupling bracket for tandem installation
- :: 6Ft. Adjustable suspension cable set included
- :: Voltage: 120~277VAC 50/60Hz
- :: Wattage: 40W
- :: Ambient Temperature: -13°F~104°F
- :: Dimmable: 0~10V dimmable
- :: CRI:>80
- :: Power Factor:>0.95
- :: Efficacy: 115LM/W
- :: IP Rating: IP20
- :: Life Span: 50,000 hours
- :: Housing: White, Anodized Aluminum
- :: Lens: Louver Lens

B11

LED PARABOLIC SUSPENDED COMMERCIAL LIGHTS





Shown with optional, field-installed prismatic lens
SCLP-4FT-TL
(not included)

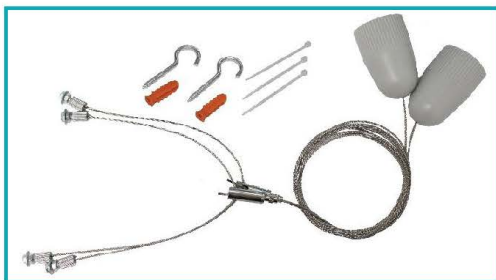

6 Ft. Suspension cable set with mini canopies
(Included)



Coupling Bracket
(not included)

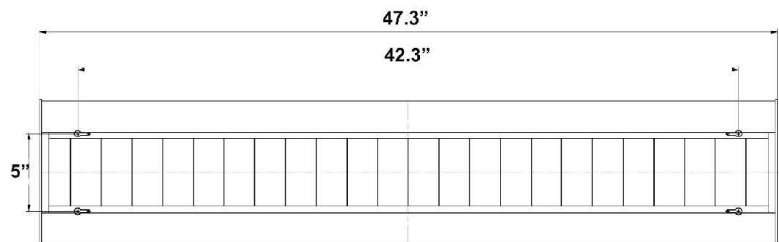

LED ARCHITECTURAL PARABOLIC SUSPENDED LIGHTS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
SCLP-4FT-40W-50K-D	40W	4400LM	5000K	47.3"(L) x 9-2/8"(W) x 2-4/8"(H)
SCLP-4FT-40W-40K-D	40W	4400LM	4000K	
SCLP-4FT-40W-35K-D	40W	4400LM	3500K	
SCLP-4FT-TL	Optional prismatic lens replaces the parabolic lens, field installed			
SCLP-SMK	6Ft. Adjustable suspension aircraft cable set + mini canopies - 1 Set included per fixture			
SCLP-CB	Coupling Bracket for tandem installation, mounts on top			

