

# WLL SERIES

LANDSCAPE LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WLL-152-30K-BK  
WLL-152-30K-ORB  
INTEGRATED LED WELL LIGHT

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ | Type: \_\_\_\_\_



Avail Finish:



The fixture has classic traditional appearance, professional light distribution design, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- PC Halfmoon Frosted Lens Suitable for Path Lighting
- LED: Built in integrated LED

## Technical Specifications

### Electrical:

- Voltage: 12-24V AC/DC
- Power Factor: >0.9
- Wattage: 6W
- Input current: 1A Max
- Efficacy: 33LPW

### Mechanical:

- Die-cast Aluminum Housing
- PC Halfmoon Frosted Lens Suitable for Path Lighting
- 3" PVC Sleeve with three 1/2" KO. 2 on sides, 1 on bottom
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP65
- Operating Temperature: -4°F to 104°F
- Suitable for Wet Locations
- 1-Year Warranty

### Lighting:

- LED: Built in integrated LED
- Total lumens: 200LM
- Color Temperatures: 3000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 52°
- Lifespan: 50,000 Hrs.

### Applications:

- The fixture has classic traditional appearance, professional light distribution design, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

### Other Models:

- 6W | 580LM | WLL-105-30K-BK • 6W | 500LM | WLL-106-30K-BK • 6W | 400LM | WLL-159-30K-BK • 6W | 580LM | WLL-181-30K-BK






Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



WG-03282022

## Photometrics: WLL-152-30K

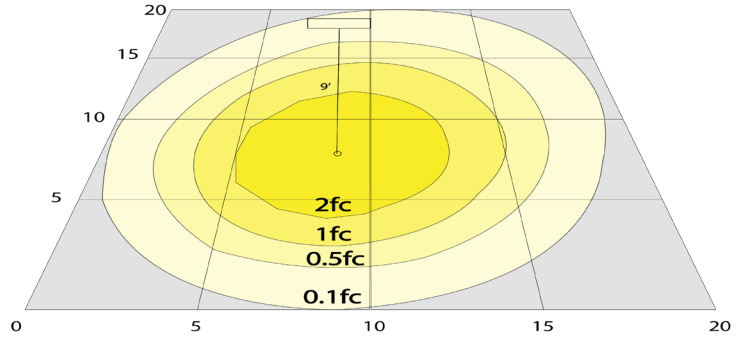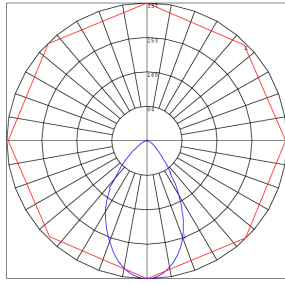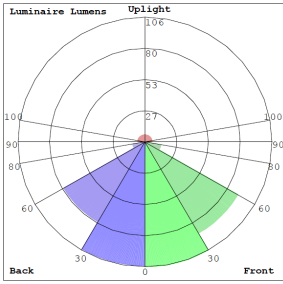

BUG Rating: B0-U1-G0

6W 3000K, Area 20' x 20' Mounting Height: 9'

## Other Views:

WLL-152-30K-BK



Side View



Top View



Bottom View

WLL-152-30K-ORB



Side View



Top View



Bottom View

## Performance Table: WLL-152-30K

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WLL-152-30K-BK	6W	12-24V	200LM	3000K	B0-U1-G0	33
WLL-152-30K-ORB				5000K		

## Sample Ordering

Model	Style	Color Temp.	Finish
WLL	152	30K = 3000K 50K = 5000K	BK = Black ORB = Oil-Rubbed-Bronze

### Accessories:

Blank = No Option For Accessories

LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables

LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables

LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up To Three 12-2 Cables

### ACCESSORIES:



#### LSWN2-100

Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



#### LSWN1

Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



#### LSWN2

Box of 24, Waterproof wire connectors, for up to three 12-2 cables

