




DIMENSIONS:

6.93"(D) x 12.09"(H)

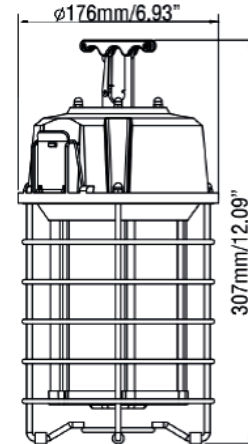

CL-CONST-40W-50K

LED CONSTRUCTION / TEMPORARY LIGHT

Ideal for construction sites, Factory/residential renovation, dock and temporary locations.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W
- Power factor: >0.9
- Max Run: 1650W-42 Fixtures
- Efficacy: 120LM/W

HOUSING SPECIFICATIONS:

- PC & Aluminum housing
- Surge 4KV-6KV
- Operating temperature: -4°F ~ 113°F
- Lifespan: 50000 Hrs.
- IP rating: IP64, Wet Locations

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CL-CONST-40W-50K	40W	120~277V AC	4800 LM	5000K

LIGHTING SPECIFICATIONS:

- LED type/brand: Epistar 2835 SMD
- Total lumens: 4800LM
- Color temperature: 5000K
- Color rendering index: >80
- Beam angle: 360°

WARRANTY: 5 years

