

# FMD SERIES Residential Lighting

FMD-13-MCT5-ORB

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_


Note: \_\_\_\_\_ | Type: \_\_\_\_\_



Selection:



The LED Flush Mount Surface Fixture is a low profile downlight intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications.

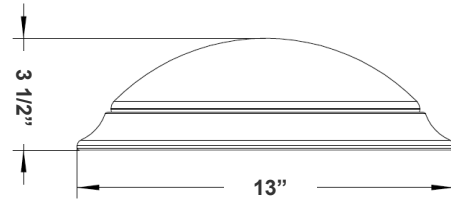

13" (W) x 3-1/2" (H)

## Features

- Oil-Rubbed Bronze
- Optics: White Translucent Acrylic Lens
- 5-Year Warranty
- 50,000 Hours Rated Life
- MCT: Multi Color Temperature (Selectable with Switch Inside Fixture)

## Technical Specifications

### Electrical:

- Voltage: 120 VAC 60Hz
- Wattage: 24W
- Power Factor: >0.9
- Efficacy: 75 LPW

### Mechanical:

- Optics: White Translucent Acrylic Lens
- Oil-Rubbed Bronze
- Operating Temp: -4°F to +104°F
- Suitable for Damp Locations When Gasket is Used
- IP Rating: IP20, Indoor Use Only

### Lighting:

- Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Total Lumens: 1800LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT (selectable with switch is on the LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 80

### Applications:

- The LED Flush Mount Surface Fixture is a low profile down light intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications

### Other Models:

- 20W | 1500LM | FMD-11-MCT5-ORB





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatefmg.com | www.westgatecontrols.co




WG-ZA-Y9-22

## Photometrics: FMD-13-MCT5-ORB



BUG Rating: B1-U3-G1

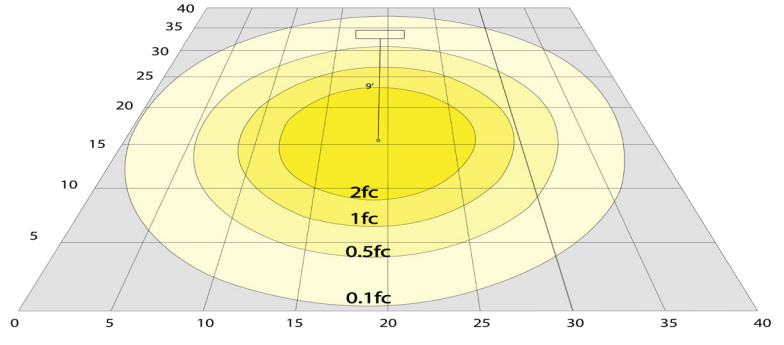

Area 40'x 40' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: FMD-13-MCT5-ORB

| MODEL NO.       | Wattage | Voltage | Lumens | Color Temp.                               | BUG Rating | LPW |
|-----------------|---------|---------|--------|---|------------|-----|
| FMD-13-MCT5-ORB | 24W     | 120V    | 1800LM | 2700K<br>3000K<br>3500K<br>4000K<br>5000K | B1-U3-G1   | 75  |

## Sample Ordering

**Model Size Color Temp. Housing**

FMD - 13 - MCT5 - ORB

## Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING  
 WEC-3RC= OPTIONAL REMOTE CONTROL

## SENSOR AND EMERGENCY BATTERY BACKUP OPTIONS:



WEC-3RC



OPT-SEN-2US

## Example:

- FMD-13-MCT5-ORB
- FMD-13-MCT5-ORB  
OPT-SEN-2US

(FOR FMD 24W MCT5 FIXTURE 120V)

(FOR FMD 24W MCT5 FIXTURE 120V)  
(ULTRASONIC BI-LEVEL DIMMING)

