

GPX SERIES Outdoor Lighting

GPX-22-75W-MCTP-CM

POST DISK LIGHT WITH CEILING MOUNT ADAPTER

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



CEILING MOUNT BRACKET

Ideal for airports, auto dealerships, corporate offices, education, government, healthcare, industrial warehouses, municipal parking, gas stations, convenient stores, recreation and public venues, restaurants, hospitality, retail and grocery stores.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

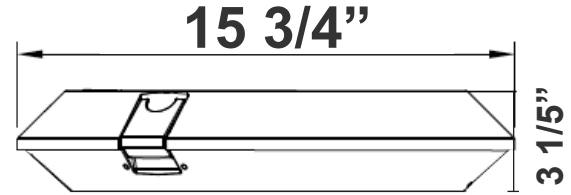

15 3/4"(W) X 4 3/5"(H)

Features

- Aluminum Housing , Outdoor Powder Coated
- 7-Year Warranty
- Multi CCT and Power: Selectable Switch Inside Of The Fixture

Technical Specifications

Electrical:

- Voltage: 100-277V AC 50/60Hz
- Wattage: 22W/37W/56W/75W
- Power Factor: 0.95
- Efficacy: 137LM/W

Mechanical:

- Aluminum Housing , Outdoor Powder Coated
- Ceiling Mount Bracket Fits on any 3" or 4" Junction Boxes with 1/2" KO on The Center
- Programmable Bi-Level Motion Sensor & Emergency Backup Options
- Operating Temperature: -86°F~122°F
- IP Rating: IP66, Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Multi CCT and Power: Selectable Switch Inside Of The Fixture
- Dimmable: 0~10V Dimming
- LED: SMD 3030
- Total Lumens: 10275LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: Type V (150° X 150°)
- Lifespan: 70000 Hrs.

Applications:

- Ideal For Garden, Amusement Park, Residential Quater , Industrial Park And Pedestrian street.




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-04062022

Photometrics: GPX-22-75W-MCTP-CM

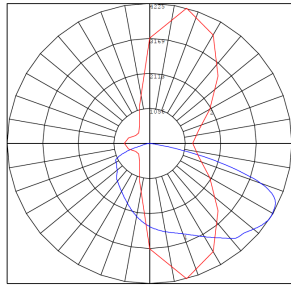

BUD Rating: B1-U1-G0

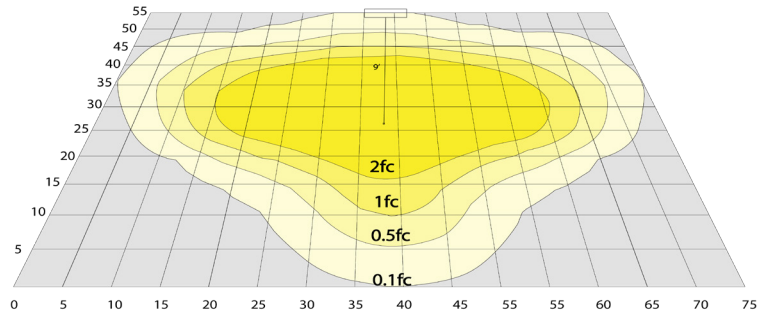

20W 5000K, Area55'x 75' Mounting Height: 9'

Other Views:



Mounting Bracket



Lens View



Top View

Performance Table: GPX-22-75W-MCTP-CM

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|--------------------|--------------------------|----------|---------------------------------------|-------------------------|------------|-----|
| GPX-22-75W-MCTP-CM | 22W 37W 56W 75W | 120-277V | 3014LM 5069LM 7672LM 10275LM | 3000K 4000K 5000K | B1-U1-G0 | 137 |

Sample Ordering

| Model | Min. Watt | Max. Watt | Color Temp. | Mount |
|-------|-----------|-----------|-------------|-------|
| GPX | 22 | 75W | MCTP | CM |

Factory Installed Options:

- Blank = No Option
- OPT-EM-OD2INT = INTERNAL EMERGENCY BACK UP BATTERY
- OPT-3MPC = MICROWAVE PHOTOCELL
- OPT-CLR-95(BK/GR/SR/WH) = COLOR PAINT
- OPT-SEN-3MR-3 = BI-LEVEL MICROWAVE SENSOR
- WEC-8RC = REMOTE CONTROL
- OPT-WP-480V = 480V OPTION
- OPT-GPX-LENS-TYPE2S = FACTORY- INSTALLED TYPE 2 LENS
- OPT-GPX-LENS-TYPE3S = FACTORY- INSTALLED TYPE 3 LENS
- OPT-GPX-LENS-FL = FACTORY- INSTALLED FROSTED GLASS LENS

FACTORY INSTALLED OPTIONS:



COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:



SILVER METALLIC
70 GLOSS
T357-GR105



SILVER METALLIC
30 GLOSS
T353-GR06



DARK RED 90
GLOSS
P009-RD02



INTERNATIONAL
ORANGE 90
GLOSS
T009-OG26



SAFETY ORANGE
90 GLOSS
T009-OG01



YELLOW 90
GLOSS
T009-YL14



YELLOW 90
GLOSS
T009-YL01



TRAFFIC GREEN
70 GLOSS
T007-GN16



GREEN 70 GLOSS
T007-GN13



GREEN 60 GLOSS
C006-GN03



BLUE 90 GLOSS
T009-BL01



DARK BLUE 80
GLOSS
T008-BL20



RAL 8028 TERRA
BROWN 90 GLOSS
C209-BR358

Hammer:




WHITE HAMMER
T013-WH09



BEIGE HAMMER
T013-BG38




GREY HAMMER
C013-GR08




SILVER
HAMMERTONE
T064-GR05



BLACK HAMMER
T013-BK62



RED HAMMER
T013-RD15



GREEN HAMMER
T013-GN220



BLUE HAMMER
T013-BL468



BRONZE HAMMER
T012-BR161

Texture:



WHITE TEXTURE
C031-WH120



FLINT GRAY
TEXTURE
T243-GR522



BLACK TEXTURE
C241-BK109



RED TEXTURE
T241-RD129



BLUE TEXTURE
C241-BL544



OIL RUBBED
BRONZE TEXTURE
T291-BR251

Vein:



BLACK/WHITE
VEIN
T075-WH34



SILVER VEIN
T375-BK26



COPPER VEIN
EXTERIOR
T075-BK211



GOLD VEIN
T375-BK10



COPPER VEIN
T375-BK07

