

JOB NAME: _____

DATE: _____

TYPE: _____

DIMENSIONS:


6-3/4"(W) x 5-1/8"(H) x 1-3/5"(D)



Fixture is prewired with 16/3 SO cord



LF series floods are prewired with 18" cord (18/3 SJTW) and compression fitting

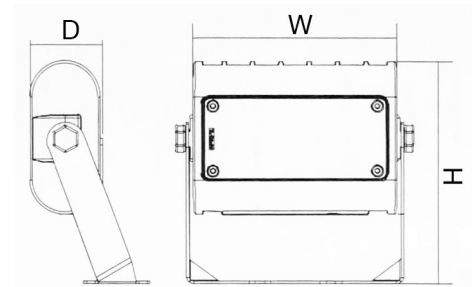

LF3-WH-30WW-TR

LED Flood Lights 3 Series

Ideal for alleys, loading docks, doorways, pathway, parking areas. Replace existing HID flood lights/wall packs. Great for use with motion sensors or other instant on/off controls. Solid state lighting technology for long life, low maintenance and high efficiency.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC ,60Hz
- Wattage: 30W
- Power factor: .90~.97

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (White)
- Cord type: 18" SJTW 18/3 AWG cable
- Operating temperature: -40°F to 104°F
- Lifespan: 70,000Hrs.
- IP rating: IP65, Wet Locations

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LF3-WH-30WW-TR	30W	100~277V AC	3600LM	3000K

LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030 LEDs
- Solid state lighting technology for long life, no maintenance needed and high-efficiency
- Lens: TIR optic lens - TYPE II
- Total lumens: 3600LM
- Color temperature: 3000K
- Color rendering index: 82-84
- Beam angle: 120°x90°

WARRANTY: 7 years



LF3-WH-30WW-TR


LED Flood Lights 3 Series

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LF3-WH-30WW-TR	30W	100~277V AC	3500 LM	3000K



PHOTOMETRICS:

Spectral Power Distribution & Chromaticity Diagram

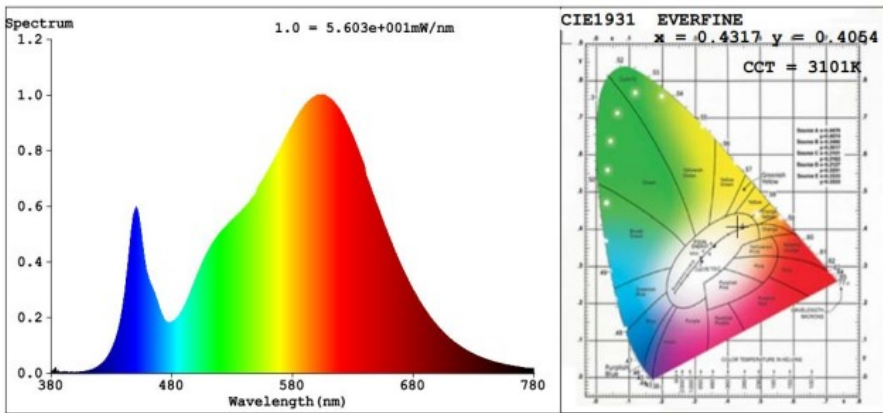

Illuminance at a Distance

Center Beam f.c.	Beam Width	
17.0ft	3.91 fc	44.0 ft 59.9 ft
34.0ft	0.98 fc	88.1 ft 119.8 ft
51.0ft	0.43 fc	132.1 ft 179.6 ft
68.0ft	0.24 fc	176.1 ft 239.5 ft
85.0ft	0.16 fc	220.2 ft 299.4 ft
102.0ft	0.11 fc	264.2 ft 359.3 ft

■ Vert. Spread: 104.7°
■ Horiz. Spread: 120.8°

