



**DIMENSIONS:**

47.75"(L) x 11.75"(H) x 1.71"(D)



Emergency System  
Pre-installed (In 1X4 Installed  
but not attached to fixture)

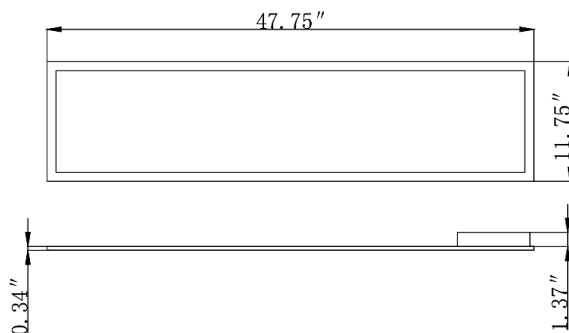

47.75" × 11.75" × 1.71"

**LP-1x4-40W-50K-DS-EM**  
**LP-1x4-40W-40K-DS-EM**

**LED PANEL LIGHTS WITH EMERGENCY BATTERY BACKUP**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 100-277VAC, 50/60Hz
- Wattage: 40W
- Current: 1050mA
- Power factor: >0.90
- Efficacy: 110LM/W
- THD: <15%

**HOUSING SPECIFICATIONS:**

- External driver mounted on top
- Earthquake hooks and suspension hooks pre-installed
- Operating temperature: -68°F ~ 104°F
- Lifespan: 50,000 Hrs.

**CERTIFICATIONS: FC, UL, DLC**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LP-1x4-40W-50K-DS-EM	40W	100~277VAC	4400LM	5000K
LP-1x4-40W-40K-DS-EM	40W	100~277VAC	4400LM	4000K

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10V dimmable
- LED type: 4014SMD LM80
- No. of LED: 384
- Total lumens: 4400LM
- Color temperature: 5000K/4000K
- Color rendering index: >80
- Soft and wide light emitting
- No infrared rays, no ultraviolet radiation, no thermal effect
- No flickering, no humming, no RF interference

**EMERGENCY UNIT SPECS :**

- Input voltage: 100~277VAC, Output power: 20W (Max), Emergency operation: ≥90 mins., Recharge: 24 Hrs.
- Pre-installed but not attached to fixture

**WARRANTY: 5 years**

