

LRD SERIES RESIDENTIAL LIGHTING

LRD-10W-27K-WTM1
LRD-10W-30K-WTM1
LRD-10W-35K-WTM1
LRD-10W-40K-WTM1
LRD-10W-50K-WTM1


LED ARCHITECTURAL RECESSED LIGHTS

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

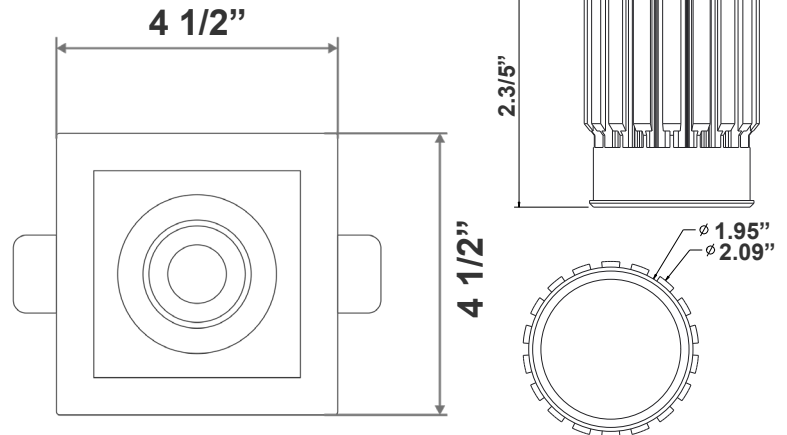

Ideal for New as well as old residential and commercial constructions.

4 1/2" (H) X 4 1/2" (W)
Driver Box Dimensions:
5-1/4" x 1-5/8" x 1-1/8"

Features

- LED Architectural Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

Technical Specifications

Electrical:

- Voltage: 120VAC
- Wattage: 10W
- Power Factor: >0.90
- Efficacy: Up to 70 LM/W

Mechanical:

- Die-cast Aluminum With white Powder Coat Finish
- Clear Glass Lens
- Junction Box Included With Fixture
- Type IC Rated: Approved for Direct Contact With Insulation
- Operating Temperature: 104°F
- Air-Tight and Type IC Rated: No housing Required
- Damp Location Only
- 5-Year Warranty

Lighting:

- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 700LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 30°
- Lifespan: 50,000 Hrs.

Applications:


- Ideal for New as well as old residential and commercial constructions.

Other Models:


- 10W | 700LM | LRD-10W-27K-WTM2-WH
- 10W | 700LM | LRD-10W-30K-WTM2-WH
- 10W | 700LM | LRD-10W-35K-WTM2-WH
- 10W | 700LM | LRD-10W-40K-WTM2-WH
- 10W | 700LM | LRD-10W-50K-WTM2-WH
- 10W | 700LM | LRD-10W-27K-WTM3-WH
- 10W | 700LM | LRD-10W-30K-WTM3-WH
- 10W | 700LM | LRD-10W-35K-WTM3-WH
- 10W | 700LM | LRD-10W-40K-WTM3-WH
- 10W | 700LM | LRD-10W-50K-WTM3-WH



Photometrics: LRD-10W-WTM1-WH

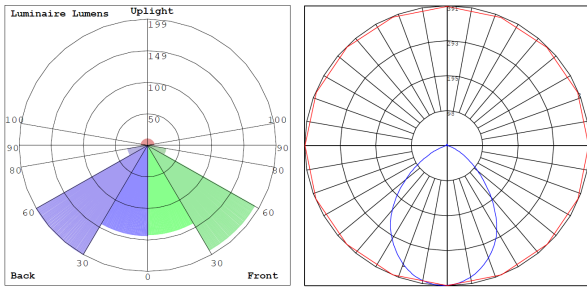

BUG Rating: B1-U2-G0

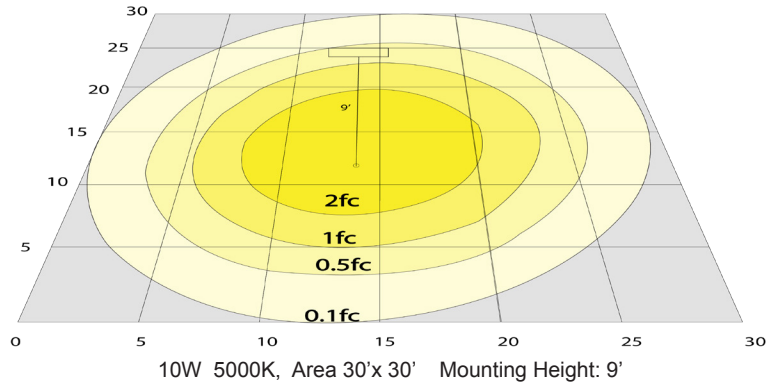

Other Views:



LRD-WTM1-WH
LRD-WTM1-WH
LRD-WTM1-WH
LRD-WTM1-WH
LRD-WTM1-WH

LRD-EGN-10W-27K-D
LRD-EGN-10W-30K-D
LRD-EGN-10W-35K-D
LRD-EGN-10W-40K-D
LRD-EGN-10W-50K-D

LRD-10W-27K-WTM1-WH
LRD-10W-30K-WTM1-WH
LRD-10W-35K-WTM1-WH
LRD-10W-40K-WTM1-WH
LRD-10W-50K-WTM1-WH

Performance Table: LRD-10W-WTM1-WH


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-27K-WTM1-WH	10W	120V	700LM	2700K	B1-U2-G0	70
LRD-10W-30K-WTM1-WH				3000K		
LRD-10W-35K-WTM1-WH				3500K		
LRD-10W-40K-WTM1-WH				4000K		
LRD-10W-50K-WTM1-WH				5000K		

Accessory:



Blank = No Option For Accessories
LRD-FGL = LRD SERES FROSTED GUASS LENS

Accessory:



LRD-FGL

Sample Ordering

Model **Wattage** **Color Temp.** **Size** **Color**

LRD - 10W - - WTM1 - WH

27K = 2700K
30K = 3000K
35K = 3500K
40K = 4000K
50K = 5000K

