

# LRD SERIES RESIDENTIAL LIGHTING

LRD-10W-27K-WTM3  
LRD-10W-30K-WTM3  
LRD-10W-35K-WTM3  
LRD-10W-40K-WTM3  
LRD-10W-50K-WTM3


LED ARCHITECTURAL RECESSED LIGHTS

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

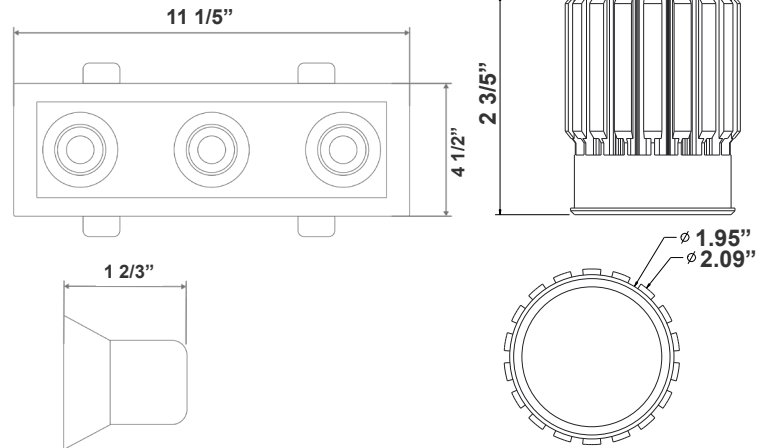

4 1/2"(H) X 11 1/5"(W) X 1 2/3"(D)  
Driver Box Dimensions:  
5-1/4" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

## Features

- LED Architectural Recessed Trim
- Die-cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

## Technical Specifications

### Electrical:

- Voltage: 120VAC
- Wattage: 10W
- Power Factor: >0.90
- Efficacy: Up to 70 LM/W

### Mechanical:

- Die-Cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Included With Fixture
- Type IC Rated: Approved For Direct Contact With Insulation
- Operating Temperature: 104°F
- Air-Tight and Type IC Rated: No Housing Required
- Damp Location Only
- 5-Year Warranty

### Lighting:

- Dimming: Dimmable down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 700LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering index: >90
- Beam Angle: 30°
- Lifespan: 50,000 Hrs.

### Applications:


- Ideal for New as well as old residential and commercial constructions.

### Other Models:


- 10W | 700LM | LRD-10W-27K-WTM1-WH
- 10W | 700LM | LRD-10W-30K-WTM1-WH
- 10W | 700LM | LRD-10W-35K-WTM1-WH
- 10W | 700LM | LRD-10W-40K-WTM1-WH
- 10W | 700LM | LRD-10W-50K-WTM1-WH
- 10W | 700LM | LRD-10W-27K-WTM2-WH
- 10W | 700LM | LRD-10W-30K-WTM2-WH
- 10W | 700LM | LRD-10W-35K-WTM2-WH
- 10W | 700LM | LRD-10W-40K-WTM2-WH
- 10W | 700LM | LRD-10W-50K-WTM2-WH



## Photometrics: LRD-10W-WTM3-WH

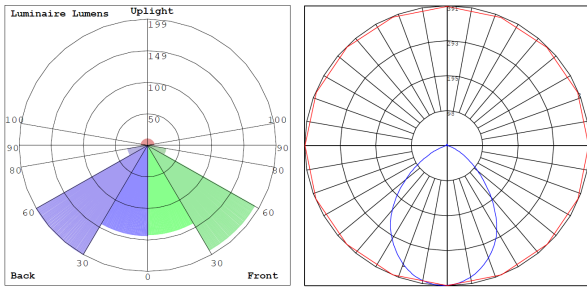

BUG Rating: B1-U2-G0

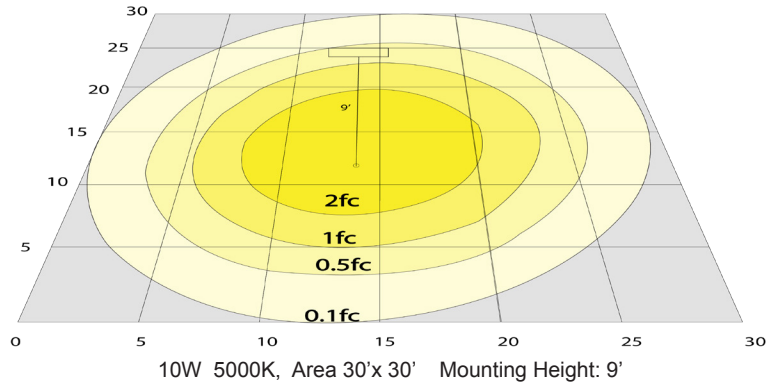

## Other Views:



LRD-WTM3-WH  
 LRD-WTM3-WH  
 LRD-WTM3-WH  
 LRD-WTM3-WH  
 LRD-WTM3-WH

LRD-EGN-10W-27K-D  
 LRD-EGN-10W-30K-D  
 LRD-EGN-10W-35K-D  
 LRD-EGN-10W-40K-D  
 LRD-EGN-10W-50K-D

LRD-10W-27K-WTM3-WH  
 LRD-10W-30K-WTM3-WH  
 LRD-10W-35K-WTM3-WH  
 LRD-10W-40K-WTM3-WH  
 LRD-10W-50K-WTM3-WH

## Performance Table: LRD-10W-WTM3-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-27K-WTM3-WH	10W	120V	700LM	2700K	B1-U2-G0	70
LRD-10W-30K-WTM3-WH				3000K		
LRD-10W-35K-WTM3-WH				3500K		
LRD-10W-40K-WTM3-WH				4000K		
LRD-10W-50K-WTM3-WH				5000K		

## Accessory:



Blank = No Option For Accessories  
 LRD-FGL = LRD SERES FROSTED GUASS LENS

## Accessory:



LRD-FGL

## Sample Ordering

**Model**    **Wattage**    **Color Temp.**    **Size**    **Color**

LRD    -    10W    -    [ ]    -    WTM3    -    WH

27K = 2700K  
 30K = 3000K  
 35K = 3500K  
 40K = 4000K  
 50K = 5000K

