

LVG-36-MCT5-BN



	•	,		
	Note:	Type:		
1				

Selection: 30" 33/5"





This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

36"(W) x 4 1/3"(H)

Features

- Corrosion and Heat Resistance Powder Coated
- · Finish: Brushed Nickel
- Durable Die-cast Aluminum

Lens Type: Polycarbonate Lens

Customer Name:
Proiect Name:

 MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120V AC 50/60Hz

Wattage: 30WPower Factor: >0.95

Total Harmonic Distortion: ≤ 20 %

Efficacy: 66 LPW

Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- IP20, Indoor Use only
- Operating Temperature: -22°F to 104°F

Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 2000LM
- Color Temperatures: 2700K/ 3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

 Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

• 18W | 1300LM | LVG-24-MCT5-BN













Photometrics: LVG-36-MCT5-BN



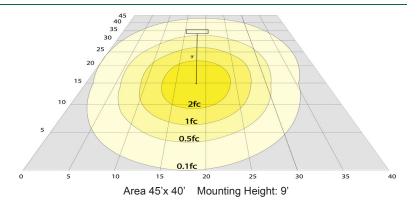

Other Views:







Side View Front View Back View

Performance Table: LVG-36-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVG-36-MCT5-BN	30W	120V	2000LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	66

Sample Ordering

Model Size Color Temp. Housing

LVG **=** 36 **=** MCT5 **=** BN

Example:
1. LVG-36-MCT5-BN

(For LVG 30W MCT5 fixture 120V)

Other Models: LVG-24-MCT5-BN







Side View Front View Back View