
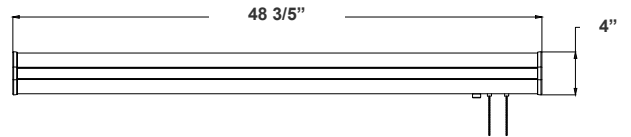


# POB SERIES Commercial Lighting

**POB-UD-4FT-60W-40K-D**  
PATIENT OVERBED HEALTHCARE LIGHT WITH PULL CHAIN AND INDICATOR LIGHT

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

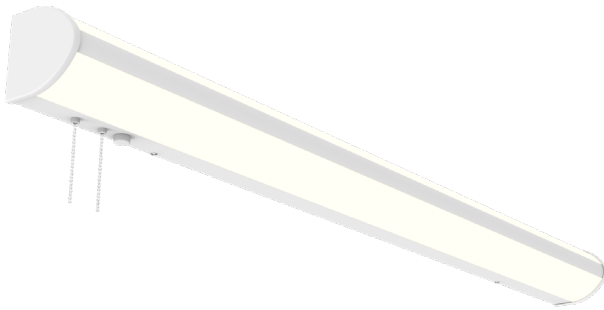

48 3/5"(W) x 4"(D)

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc. Engineered with stable performance LED engines and the world's top brand LED driver. Same footprint as traditional 2-lamp strip lights

## Features

- LED Strip Lights
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Frosted Diffuse Polycarbonate Lens

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W Down & 20W Up Light
- Power Factor: >0.98
- Efficacy: 115 LPW

### Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 6900LM
- Color Temperatures: 4000K
- Color Rendering Index: CRI ≥ 80

### Mechanical:


- White Finish
- Housing: Heavy Die-Formed Steel, White Powder Coated
- Lens Snaps Into The Tabs Of The Housing Fixture
- Mounting: Surface Mount, Wall Mount
- Operating Temperature: -22°F -104°F
- Suitable For Damp Location

### Applications:



- Ideal for architectural lighting solutions, a variety of industrial, commercial and residential applications

### Pull Chain Steps


- #1  
• On/OFF The Indicator Light
- #2  
• 1- Up light  
• 2- Downlight  
• 3- Up/down on  
• 4- Off

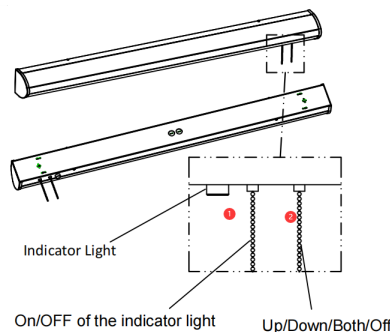

**Photometrics:** POB-UD-4FT-60W-40K-D




BUD Rating: B1-U3-G2

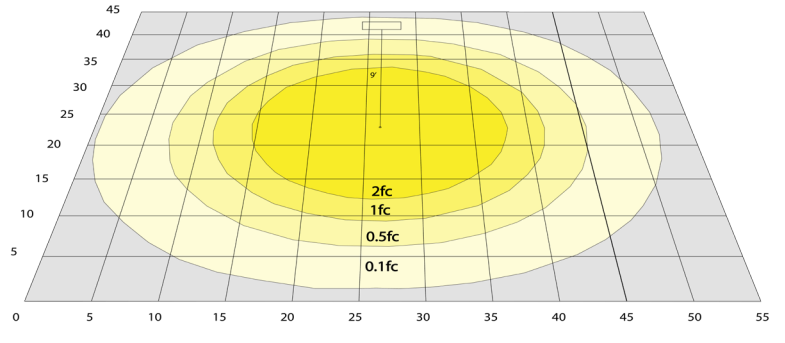


60W 5000K, Area 45'x 55' Mounting Height: 9'

**Other Views:**

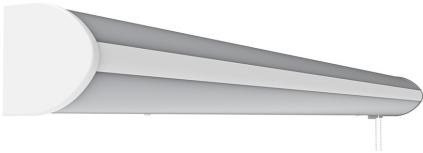

Side View

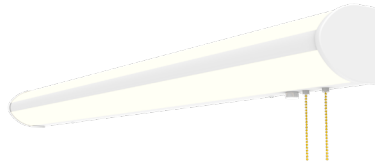

Front View



Back View

**Performance Table:** POB-UD-4FT-60W-40K-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
POB-UD-4FT-60W-40K-D	60W	120~277V	6900LM	4000K	B1-U3-G2	115

**Sample Ordering**

Model	Up/Down	Size	Wattage	Color Temp.	Dimming
POB	UD	4FT	60W	40K	D

**Factory-Installed Options:**

- Blank = No Option For Accessories
- OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY
- OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING
- OPT-WEC-3RC = REMOTE CONTROL
- OPT-SEN-LLHB-OC1 = LLHB-OC1 EXTERNAL STANDARD PIR OPT-SENSOR
- OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE
- OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE
- OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A, 125V, 3-CONDUCTOR 18AWG, WHITE

**FACTORY-INSTALLED OPTIONS:**

