


# SRPL SERIES Commercial Lighting

SRPL-40W-MCT-D  
LED SUSPENDED UP/DOWN CLEAR ROUND PANEL LIGHT  
**MCT<sub>B</sub>** Multi Color Temperature (Selectable)

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

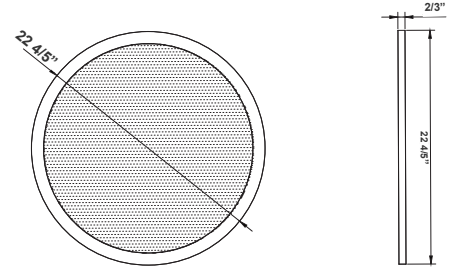

**22 4/5" (D) x 22 4/5" (H) x 2/3" (W)**  
**Canopy Dimensions: 8" X 1-3/4"**

These LED Round Suspended Up/Down Panel Lights are ideal for hotels, offices, retail outlets, restaurants, parking garages, storage rooms, conference rooms, education facilities, and more.

## Features

- White, Die-cast Aluminum
- Lens: Prismatic Polycarbonate
- 50,000 Hours Rated Life
- 5-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 40W
- Power Factor: >0.95
- Efficacy: 105 LPW

### Lighting:

- Dimming: 0~10V dimmable
- Total Lumens (Up/Down): 2100/2100 LM
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Rated Life: 50,000 Hours

### Mechanical:



- White, Die-cast Aluminum
- Lens: Prismatic Polycarbonate
- 22" Round
- Coupling Brackets for Tandem Installation Pre-installed
- Adjustable 10FT Suspension Cable And The Canopy Set
- IP Rating: IP20
- Operating Temperature: -13°F ~ 104°F
- 5-Year Warranty

### Applications:


- Hotel, Offices, Retail Outlets, Restaurant, Parking Garages, Storage Room, Conference Room, Education Facilities and more.



## Photometrics: SRPL-40W-MCT-D




BUD Rating: B1-U5-G1

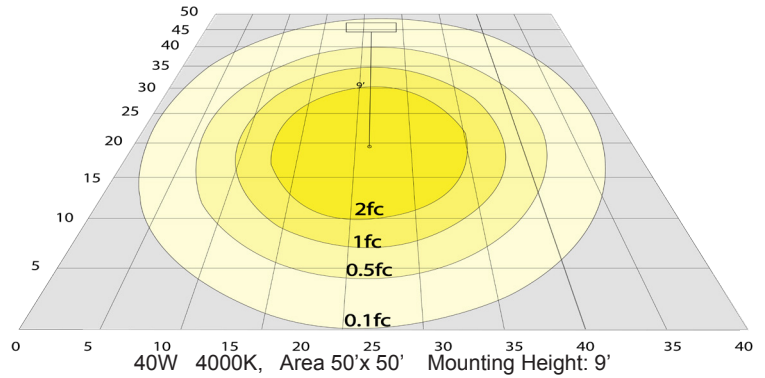

## Other Views:



Side View

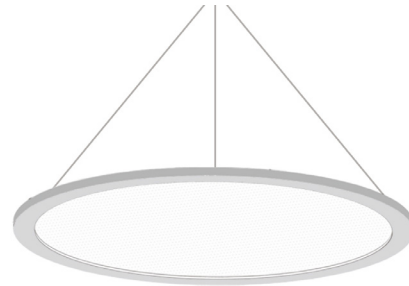

Bottom View

## Performance Table: SRPL-40W-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SRPL-40W-MCT-D	40W	120~277V	2100LM/2100LM	3500K 4000K 5000K	B1-U5-G1	105

## Sample Ordering

Model Wattage Color Temp. Feature

SRPL - 40W - MCT - D

## Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-CM1INT = INTERNAL EMERGENCY BACK UP BATTERY

OPT-SEN-2MDR-36 = PROGRAMMABLE MICROWAVE BI-LEVEL

WEC-3RC = REMOTE CONTROL

## FACTORY-INSTALLED OPTIONS:



OPT-EM-CM1INT



OPT-SEN-2MDR-36



WEC-3RC

