

WMX SERIES

WMX-LG-50-120W-30K
WMX-LG-50-120W-40K
WMX-LG-50-120W-50K

LED OUTDOOR LIGHTING


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

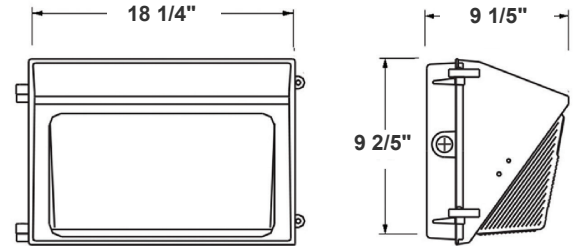

18 1/4"(W) x 9 1/5"(H) x 9 1/5"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Connect One End or Both Ends (Dual Function)
- Multi-Power Switch is inside the Fixture
- 7-year warranty
- Prismatic Borosilicate Glass Lens

Technical Specifications

Electrical:

- Input Wattage: 50/80/100/120W
- Input Voltage: 120-277V AC 50/60Hz
- Input current: 1.4 A
- Power factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Lens: Prismatic Borosilicate Glass Lens
- Same Footprint as Traditional HID Wall Packs
- Four 1/2" Hubs: 1 top, 1 on Each Side, 1 Rear
- Mounting: Wall Mounting
- Operating Temperature: -40°F ~ 104°F
- Lifespan: 70000 Hrs.
- IP rating: IP65, Wet Locations

Lighting:

- Dimming: 0-10V Dimming
- Chip: Philips Lumileds LEDs
- Multi-Power Switch is inside the Fixture
- Total Lumens: 16500LM Max.
- Color Temperature: 3000K/4000K/5000K
- CRI: >70

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID wall packs
- Great for use with photocell

Other Models:




- 50W | 6800LM | WMX-MD-20-50W-30K
- 50W | 6800LM | WMX-MD-20-50W-40K
- 50W | 6800LM | WMX-MD-20-50W-50K
- 30W | 4200LM | WMX-SM-15-30W-30K
- 30W | 4200LM | WMX-SM-15-30W-40K
- 30W | 4200LM | WMX-SM-15-30W-50K
- 80W | 11200LM | WMX-MD-20-80W-30K
- 80W | 11200LM | WMX-MD-20-80W-40K
- 80W | 11200LM | WMX-MD-20-80W-50K



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: WMX-LG-50-120W

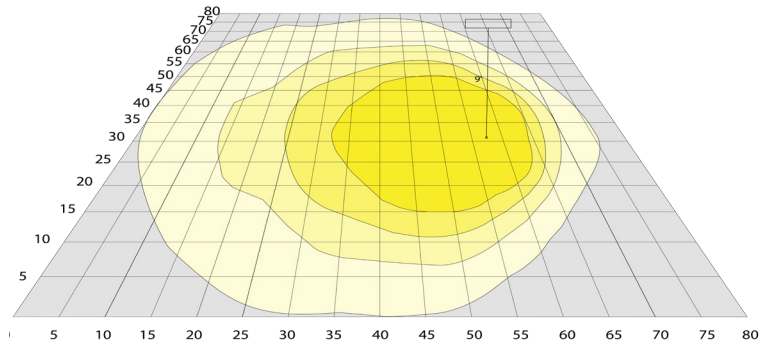

BUG Rating: B3-U5-G4

Area 80'x 80' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: WMX-LG-50-120W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMX-LG-50-120W-30K	50W	120-277V	7000LM	3000K 4000K 5000K	B3-U5-G4	130
			7150LM			
			7300LM			
			10500LM			
WMX-LG-50-120W-40K	80W		10900LM			
			11300LM			
			13100LM			
WMX-LG-50-120W-50K	100W		13600LM			
			14100LM			
WMX-LG-50-120W-50K	120W		15300LM			
			15900LM			
			16500LM			
		16500LM				



Sample Ordering

Model	Size	Min. Watt	Max. Watt	Color Temp.
WMX	LG	50	120W	<input type="text"/> 30K = 3000K 40K = 4000K 50K = 5000K

Accessories:

Blank = No Option For Accessories
 WML-SH3= SHIELD FOR WMXPRO 120W

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-OD1EXT = EXTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-3MRLV-5 = PROGRAMMABLE MICROWAVE (BI-LEVEL FOR 80W & UP)
 OPT-PC-B = BUTTON
 OPT-CLR-85 = COLOR PAINT
 WEC-8RC= REMOTE CONTROL
 OPT-TRS-T20 = TAMPER RESISTANT SCREW
 OPT-WP-480V = CHANGE VOLTAGE

ACCESSORY:



WML-SH3

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD3INT



OPT-PC-B



WEC-8RC



OPT-SEN-3MRLV-5

Example:

1. WMX-LG-50-120W-50K

(FOR 120W MAX 50K FIXTURE 120-277V)

2. WMX-LG-50-120W-50K
 OPT-EM-OD3INT

(FOR 120W MAX 50K FIXTURE 120-277V)
 (INTERNAL EMERGENCY BACKUP BATTERY)

Dimensions:



WML-SH3
 SHIELD FOR WMXPRO 120W

